

HAWK[®]
TOTAL MUSIC SOLUTION

www.hawkpro.in

HAWK[®]
TOTAL MUSIC SOLUTION

VIBE

SERIES

ACTIVE SPEAKERS



TURN UP YOUR VIBE

**2 YEAR MANUFACTURING WARRANTY AND
1 YEAR EXTENDED WARRANTY UPON REGISTRATION.**



MICROPHONE



LEO

Premium Quality Condenser Microphone

Capsule size: 34mm
 Capsule Type: Condenser
 Capsule Diaphragm: Gold
 Frequency Response: 20Hz-20kHz
 Sensitivity: -32dB±2dB (at 1kHz 0dB=1V/Pa)
 Max SPL: 130dB SPL (at 1kHz≤1% T.H.D)
 S/N: ≤12dB A
 Directivity: Cardioid
 Power Dupplier: 48V Phantom Power
 AC: 3.2 mA



HM01

Premium Quality Dynamic Microphone

Capsule: Dynamic
 Polar Pattern: Cardioid
 Frequency Response: 50Hz-16kHz
 Sensitivity: -55dB±2dBV/Pa (0dB=1V/Pa at 1kHz)
 Output Impedance: 140Ω±30% at 1kHz
 Max. Input SPL: 135dB SPL



HM05

Premium Quality Dynamic Microphone

Capsule: Dynamic
 Polar Pattern: Ultra - Cardioid
 Frequency Response: 60Hz-13kHz
 Sensitivity: -55.3(±3) dB (at 1kHz) (dB=1V/Pa)
 Output Impedance: 600Ω±30% at 1kHz
 Max. Input SPL: 135dB SPL



HM10

Premium Quality Dynamic Microphone

Capsule: Dynamic
 Polar Pattern: Cardioid
 Frequency Response: 50Hz-16kHz
 Sensitivity: -75dB±3dBV/Pa (0dB=1V/Pa at 1kHz)
 Output Impedance: 500Ω±30% at 1kHz
 Max. Input SPL: 135dB

MICROPHONE



HM50
*Premium Quality
Dynamic Microphone*

*Capsule: Dynamic
Polar Pattern: Cardioid
Frequency Response: 50Hz-53kHz
Sensitivity: -75dB±3dBV/Pa (0dB=1V/Pa at 1kHz)
Output Impedance: 600Ω±30% at 1kHz*



HM57
*Dynamic Instrument
Microphone*

*Polar Pattern: Cardioid
Frequency Response: 50Hz-16kHz
Sensitivity: -56dB±3dBV/Pa (0dB=1V/Pa at 1kHz)
Output Impedance: 19Ω±20% at 1kHz*



ELARA
*Studio Condenser
Microphone*

*Element: Ø34mm gold plated diaphragm
Polar Pattern: Cardioid
Frequency Response: 20Hz-20kHz
Sensitivity: -34dB±2dB (0dB=1V/Pa at 1kHz)
Output Impedance: 200Ω±30% (at 1kHz)
Overload Impedance: ≥1000Q
Equivalent Noise Level: 15dB A
Max SPL: 135dB(at 1kHz≤1%T.H.D)
S/N ratio: 79dB
Voltage: 48V phantom Power
Current Consumption: 3.2mA*



ATHENA
*Studio Condenser
Microphone*

*Capsule: Ø34mm gold plated diaphragm
Frequency Response: 20Hz-20kHz
Sensitivity: -31dB±2dB(at 1kHz 0dB=1V/Pa)
Max SPL: 135dB SPL(at 1kHz≤1%T.H.D)
S/N ratio: ≥72dB
Polar Pattern: Cardioid
Power Analog reg. :48V Phantom Power
Output Connectivity: 3-Pin XLR
Current Consumption: 4.8mA*

MICROPHONE



WSH-1000

Wireless Microphone System

Carrier frequency: 640-690MHz
 Frequency Stability: $\pm 0.005\%$
 Frequency : selectable with 100Freq.
 Modulation mode: FM
 Maximum Deviation: $\pm 20\text{KHz}$
 Audio Frequency Response: 50Hz-18KHz
 S/N ratio: $>80\text{dB}$
 Audio Dynamic Range: $>80\text{dB}$
 T.H.D.: $<0.8\%$
 Cover Range: 50-80M(in open space)
 Operating temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$



WDH-2000

Wireless Microphone System


Carrier frequency: 640-690MHz
 Frequency Stability: $\pm 0.005\%$
 Frequency : selectable with 200Freq.
 Modulation mode: FM
 Maximum Deviation: $\pm 20\text{KHz}$
 Audio Frequency Response: 50Hz-18KHz
 S/N ratio: $>80\text{dB}$
 Audio Dynamic Range: $>80\text{dB}$
 T.H.D.: $<0.8\%$
 Cover Range: 50-80M(in open space)
 Operating temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$



WDL-3000

Wireless Microphone System

Carrier frequency: 640-690MHz
 Frequency Stability: $\pm 0.005\%$
 Frequency : selectable with 200Freq.
 Modulation mode: FM
 Maximum Deviation: $\pm 20\text{KHz}$
 Audio Frequency Response: 50Hz-18KHz
 S/N ratio: $>80\text{dB}$
 Audio Dynamic Range: $>80\text{dB}$
 T.H.D.: $<0.8\%$
 Cover Range: 50-80M(in open space)
 Operating temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$



WDHS-4000

Wireless Microphone System

Carrier frequency: 640-690MHz
 Frequency Stability: $\pm 0.005\%$
 Frequency : selectable with 200Freq.
 Modulation mode: FM
 Maximum Deviation: $\pm 20\text{KHz}$
 Audio Frequency Response: 50Hz-18KHz
 S/N ratio: $>80\text{dB}$
 Audio Dynamic Range: $>80\text{dB}$
 T.H.D.: $<0.8\%$
 Cover Range: 50-80M(in open space)
 Operating temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$

SPEAKERS



VIBE 12
12" Active Speaker

System: 2-way full range
 Woofer: 12", 600Z magnet
 Tweeter: 44mm PEN.Diap.Driver
 Peak Power: 2000Watts
 Impedance: 4OHM
 Frequency Range: 40Hz~18KHz
 Sensitivity: 102dB(+/-2dB)
 Connectivity: XLR/COMBO/Bluetooth
 Mic Input Level: <5mV
 Line Input/ Output Level: 250mV
 Package size: 445X415X690MM
 DSP Mode: 4 Presets



VIBE 15
15" Active Speaker

System: 2-way full range
 Woofer: 15", 800Z magnet
 Tweeter: 44mm PEN.Diap.Driver
 Peak Power: 2000Watts
 Impedance: 4OHM
 Frequency Range: 40Hz~18KHz
 Sensitivity: 108dB(+/-2dB)
 Connectivity: XLR/COMBO/Bluetooth
 Mic Input Level: <5mV
 Line Input/ Output Level: 250mV
 Package size: 485X480X785MM
 DSP Mode: 4 Presets



VIBE 115A
15" Active Subwoofer

System: 15 Subwoofer
 Woofer: 15", 800Z magnet
 Peak Power: 2200Watts
 Impedance: 8OHM
 Frequency Range: 35Hz~150Hz
 Sensitivity: 126dB(+/-2dB)
 Connector: XLR/COMBO
 Line Input / Output Level: 250mV
 Package size: 655X540X670MM



VIBE 118A
18" Active Subwoofer

System: 18 Subwoofer
 Woofer: 18", 800Z magnet
 Peak Power: 2600Watts
 Impedance: 8OHM
 Frequency Range: 30Hz~130KHz
 Sensitivity: 132dB(+/-2dB)
 Connector: XLR/COMBO
 Line Input / Output Level: 250mV
 Package size: 715X595X740MM

SPEAKERS




VIBE MINI8BT
*All-in-One Battery-Powered
Portable PA with
Professional-Grade Mixer*

*System: Bidirectional
Woofer: 8", 400Z magnet
Tweeter: 25mm titanium film. conductor
Maximum Power: 1800Watts
Impedance: 8ohms
Frequency Range: 40Hz~18KHz
Consider: 98dB(+/-2dB)
Connectivity: XLR/COMBO/Bluetooth/RCA/Aux
Mic Input Level: <5mV
Line Input/ Output Level: 250volts
Power Supply: 220volts*



PULSE 15
15" Active Speaker

*Type: Two way Bi-Amp
Frequency Response: 55Hz-20kHz
Sensitivity(1m/1w): 93dB
Impedance: 4ohms
Woofer: 1X12" 65mm 500Z
Driver: 1.75" Titanium
SPL: 123dB
Bluetooth Module: Yes
DSP: 4 Presets
Protections:
Over Temp;OverLoad;DC Protect;Over
Voltage;Low Voltage;Soft start.
Crossover: 2.0Khz
Dimension(WxHxD): 435x405x680mm
Weight: 19kg*

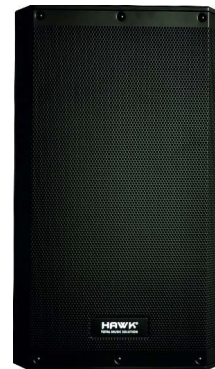

PULSE 12
12" Active Speaker

*Type: Two way Bi-Amp
Frequency Response: 50Hz-20kHz
Sensitivity(1m/1w): 93dB
Impedance: 4ohms
Woofer: 1X15" 75mm 600Z
Driver: 1.75" Titanium
SPL: 126dB
Bluetooth Module: Yes
DSP: 4 Presets
Protections:
Over Temp;OverLoad;DC Protect;Over
Voltage;Low Voltage;Soft start.
Crossover: 2.0Khz
Dimension(WxHxD): 475x475x775mm
Weight: 24kg*



M50
*BI-AMPED TWO WAY
ACTIVE SPEAKER*

*Type: Biamp Two Way Active Speaker
Power handling: 50W
Frequency Response-10dB: 55Hz-22kHz
Woofer: 5.25" Coating-Paper Cone
Tweeter: 1" Silk Dome
Output Power: Bass: 50W, High: 20W
SPL: 108dB
Input-XLR Balanced / RCA Unbalanced
Variable High & Low Frequency Adjustments*



M60
*BI-AMPED TWO WAY
ACTIVE SPEAKER*

*Type: Biamp Two Way Active Speaker
Power handling: 60W
Frequency Response-10dB: 45Hz-22kHz
Woofer: 6.5" Coating-Paper Cone
Tweeter: 1" Silk Dome
Output Power: Bass: 60W, High: 30W
SPL: 111dB
Input-XLR Balanced / RCA Unbalanced
Variable High & Low Frequency Adjustments*

MICROPHONE STANDS



HMS65

Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 800mm.
- Height: 1000mm – 1800mm.
- Threading: 5/8".



HMS65T

Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 800mm.
- Height: 1000mm – 1800mm.
- Threading: 5/8".



HMS65S

Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 800mm.
- Height: 1000mm – 1800mm.
- Threading: 5/8".



HMS30TB

Microphone Stand


- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 800mm.
- Height: 1000mm – 1800mm.
- Threading: 5/8".



MS50

Short Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 800mm.
- Height: 1000mm – 1800mm.
- Threading: 5/8".

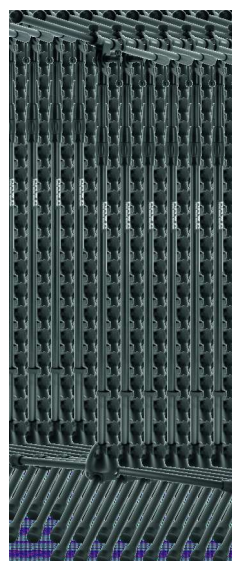


MS100

Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 20" - 35.8" / 51 cm-91cm
- Height: 39" - 62" / 100cm - 160 cm.
- Threading: 5/8" -27".

MICROPHONE STANDS

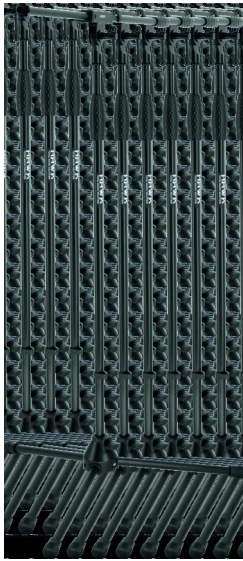

TS100

Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 20" - 35.8" / 51 cm-91cm
- Height: 39" - 62" / 100cm - 160 cm.
- Threading: 5/8" -27".




HMS30FB

Heavy Base Microphone Stand

- Strong, tip-resistant tripod base.
- Scratch-resistant powder coat finish.
- Nylon leg housing for dependable base support.
- Non-slip rubber feet.
- Boom Length: 800mm.
- Height: 1000mm – 1800mm.
- Threading: 5/8".

SPEAKER STANDS

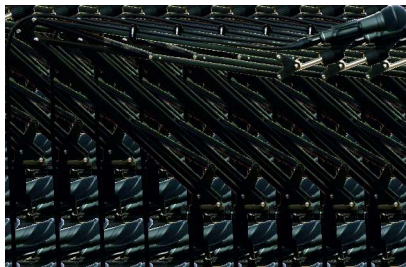

- The adjustable Black Scissor Arm Stand is made of high quality steel frame, plastic Mic Clip (INCLUDED), sturdy and durable.
- Scissor Arm Stand : The adjustable arms can be fold up and easy for you to carry around and allow you to adjust the suitable angle and height to show your perfect voice.
- Universal mounting clamp attaches to tables, desks, shelves, counters, etc. Suitable for any stores, families, stages, studios, broadcasting and TV stations, etc. with an adjustable positioning screw, can easily clip to any desktop up to 1.7"/4.5cm thick.



HMPS001

Studio Monitor Stand

- Height-adjustable stand for studio monitors.
- Locking pin ensures stable and accurate height positions.
- Leveling floor spikes and rubber feet included.
- Low-profile base can be easily positioned into tight spaces.
- Platform Dimensions: 9" x 9" (229mm x 229mm).
- Base Dimensions: 17.25" x 17.25" x 17.25" (438mm x 438mm x 438mm).
- Weight Capacity: 25 Kgs per Stand.



HSBP001

Sub Woofer Pole

- Heavy-duty construction.
- Height adjustable.
- Friction locking knob with security pin.




HSBPM20

Sub Woofer Pole

- Heavy-duty construction.
- Height adjustable.
- Friction locking knob with security pin.

SPEAKER STANDS

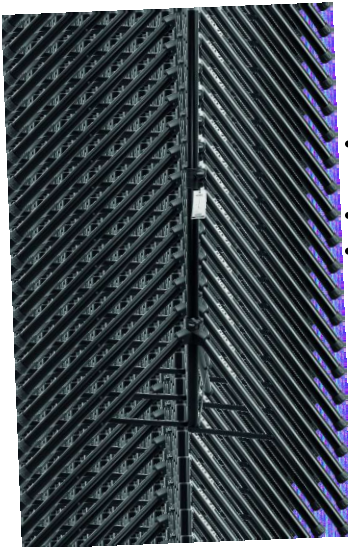

HSP001
Speaker Tripod Stand

- Heavy-duty construction.
- Height adjustable.
- Friction locking knob with security pin.

WALL MOUNT SPEAKER STANDS



HW001
Wall Mount Speaker Stand

- Heavy-duty nut and bolt support 40 Kgs and swivel 90° left and 90 right.
- 1 3/8" speaker pole mounts a wide range of speakers.
- Adjustable tilt angle enables speakers to point either straight ahead or up to 45° down.
- Adjustable tilt angle at base up to 45° down.


WALL MOUNT SPEAKER STANDS



HW002
Wall Mount Speaker Stand

- Application: Small to medium speaker cabinet wall mount
- Weight Capacity: 40 kg
- Tilt Angle Adjustment: 45 Degree
- Sideways Adjustment: 90 Degree
- Construction: Steel
- Color: Black

KEYBOARD STANDS

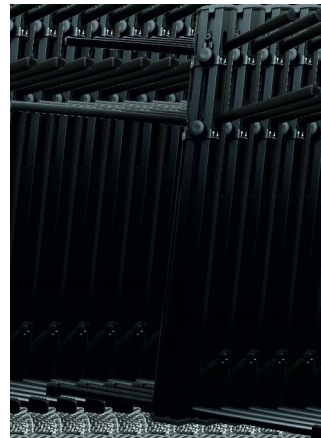


PROMAX
Double Keyboards Stand

- Foldable and compact but solid structure
- Supporting arms of adjustable height
- 6063T-6 Aluminum for the mast
- A360 Aluminum for connection parts, Plastic wire clip
- Load capacity: Upper layer: 20kg, Lower layer: 40kg
- Suitable for various keyboards


HX200
Double Teir Keyboard Stand

- Adjustable height, suitable for any venue. Piano stand features rubber hands, feet, and stability straps all designed secure your keyboard or digital piano in place.

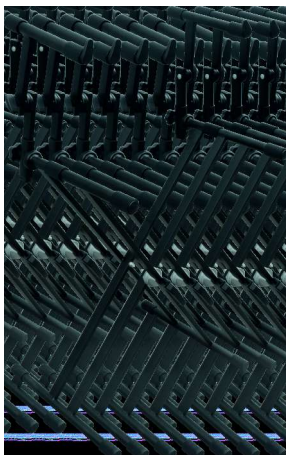

HX001
Assembled Single-braced X-style Stand


- Assembled single-braced X-style stand
- Strong, sturdy steel design
- Five height positions
- Folds flat for simple storage and transport
- Rubber end caps keeps instrument scratch-free
- Height: 641mm – 978mm
- Leg Depth: 476mm
- Arm Depth: 337mm
- Steel Tubing: 25mm
- Load Capacity: 45

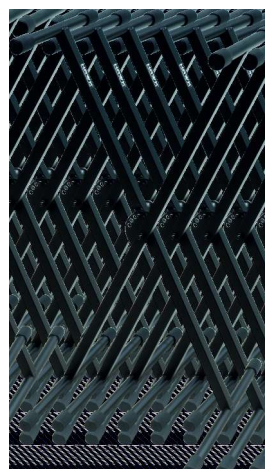

KEYBOARD STANDS

HX002


Double-braced for heavier keyboards

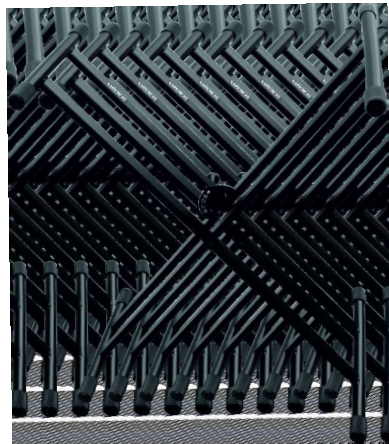

- Double-braced for heavier keyboards
- Five height positions
- Easy-to-adjust pull-style knob locks stand in place
- Constructed from strong steel tubing
- Height: 648mm – 965mm
- Leg Depth: 489mm
- Arm Depth: 400mm
- Steel Tubing: 25mm
- Load Capacity: 57 kg

HX003

Assembled single-braced X-style stand

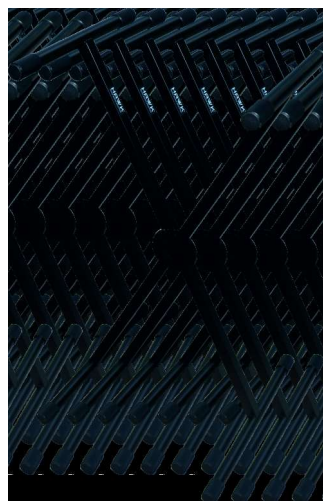

- Assembled single-braced X-style stand
- Strong, sturdy steel design
- Five height positions adjusted by knob
- Folds flat for simple storage and transport
- Rubber end caps keeps instrument scratch-free
- Height: 641mm – 978mm
- Leg Depth: 476mm
- Arm Depth: 337mm
- Steel Tubing: 25mm
- Load Capacity: 45

KEYBOARD STANDS

HX004

Double-braced for heavier keyboards



- Double-braced for heavier keyboards
- Five height positions adjusted by knob
- Constructed from strong steel tubing
- Height: 648mm – 965mm
- Leg Depth: 489mm
- Arm Depth: 400mm
- Steel Tubing: 25mm
- Load Capacity: 57 kg

GUITAR STAND

HGS001

A Style Guitar Stand for Electric, Bass, Acoustic Guitar



- Application: A-Style Guitar Stand
- Width : 190-350 mm
- Height Adjustment: 420 mm
- Construction: Steel

GUITAR STAND

HGS002

Adjustable Guitar Stand For Electric, Bass, Acoustic Guitar




- Application: Guitar Stand
- Height Adjustment: 660-780 mm
- Construction: Steel

MUSIC SHEET STAND

HMU001

Heavy Duty Music Stand

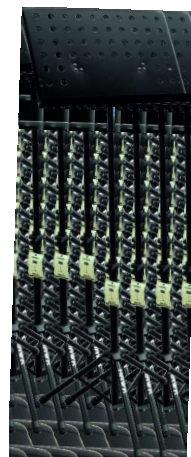

- Professional collapsible music stand made of durable and heavy duty metal.
- No worry about the loading capacity of this Music Stand with sturdy metal tripod legs, which have non-slip rubber caps on the bottom that secure at any height.

SNAKE CABLE/CABLE ROLL

16 Channel Ready-Made Snake Cable With Drum



- Snake Cable on a Reel.
- All XLR Connections.
- Sends: 16 XLR Male Connectors.
- Returns: 4 XLR Female Connectors.
- Well labeled on both ends.
- Fantail is color coded and numerically labeled.
- 100% individually shielded pairs.
- Heavy Duty Steel Reel.
- High quality XLR connectors on both ends.
- One Year Warranty.

MODEL	SIZE
HSD1604LU30	30M

16 Channel Ready-Made Snake Cable With Drum



- snake cable on a reel.
- All XLR connections.
- Sends: 16 XLR male connectors.
- Returns: 8 XLR female connectors.
- Well labeled on both ends.
- Fantail is color coded and numerically labeled.
- 100% individually shielded pairs.
- Heavy duty steel reel.
- High quality XLR connectors on both ends.
- One year warranty.

MODEL	SIZE
HSD1608LU30	30M

24 Channel Ready-Made Snake Cable With Drum



- Snake cable.
- All XLR connections.
- Sends: 24 XLR male connectors.
- Returns: 8 XLR female connectors.
- Well labeled on both ends.
- Fantail is color coded and numerically labeled.
- 100% individually shielded pairs.
- Heavy duty steel reel.
- High quality XLR connectors on both ends.
- One year warranty.

MODEL	SIZE
HSD2408LU30	30M
HSD2408LU50	50M

32 Channel Ready-Made Snake Cable With Drum



- Snake Cable on a Reel.
- All XLR Connections.
- Sends: 32 XLR Male Connectors.
- Returns: 8 XLR Female Connectors.
- Well labeled on both ends.
- Fantail is color coded and numerically labeled.
- 100% individually shielded pairs.
- Heavy Duty Steel Reel.
- High quality XLR connectors on both ends.
- One Year Warranty.

MODEL	SIZE
HSD3208LU30	30M
HSD3208LU50	50M

8 Channel Ready-Made Snake Cable



MODEL	SIZE
HSS804LU10	10M
HSS804LU15	15M

- Send: 8 XLR Male Connectors.
- Returns: 4 XLR Female Connectors.
- Heavy Duty Steel Stage Box with Handle.
- Fantail and Stage Box are both clearly Numerically Labeled.
- Fantail is color coded as well.
- 100% Individually Shielded Pairs.
- High Quality XLR connectors at both ends.
- One Year Warranty.

12 Channel Ready-Made Snake Cable



MODEL	SIZE
HSS1204LU15	15M
HSS1204LU30	30M

- Send: 12 XLR Male Connectors.
- Returns: 4 XLR Female Connectors.
- Heavy Duty Steel Stage Box with Handle.
- Fantail and Stage Box are both clearly Numerically Labeled.
- Fantail is color coded as well.
- 100% Individually Shielded Pairs.
- High Quality XLR connectors at both ends.
- One Year Warranty.

16 Channel Ready-Made Snake Cable



MODEL	SIZE
HSS1604LU15	15M
HSS1604LU30	30M

- Send: 16 XLR Male Connectors.
- Returns: 4 XLR Female Connectors.
- Heavy Duty Steel Stage Box with Handle.
- Fantail and Stage Box are both clearly Numerically Labeled.
- Fantail is color coded as well.
- 100% Individually Shielded Pairs.
- High Quality XLR connectors at both ends.
- One Year Warranty.

16 Channel Ready-Made Snake Cable



MODEL	SIZE
HSS1608LU30	30M

- Send: 16 XLR Male Connectors.
- Returns: 8 XLR Female Connectors.
- Heavy Duty Steel Stage Box with Handle.
- Fantail and Stage Box are both clearly Numerically Labeled.
- Fantail is color coded as well.
- 100% Individually Shielded Pairs.
- High Quality XLR connectors at both ends.
- One Year Warranty.

SNAKE CABLE/CABLE ROLL



24 Channel Ready-Made Snake Cable

MODEL	SIZE
HSS2408LU30	30M
HSS2408LU50	50M

- Send: 24 XLR Male Connectors.
- Returns: 8 XLR Female Connectors.
- Heavy Duty Steel Stage Box with Handle.
- Fantail and Stage Box are both clearly Numerically Labeled.
- Fantail is color coded as well.
- 100% Individually Shielded Pairs.
- High Quality XLR connectors at both ends.
- One Year Warranty.




32 Channel Ready-Made Snake Cable

MODEL	SIZE
HSS3208LU30	30M
HSS3208LU50	50M

- Send: 32 XLR Male Connectors.
- Returns: 8 XLR Female Connectors.
- Heavy Duty Steel Stage Box with Handle.
- Fantail and Stage Box are both clearly Numerically Labeled.
- Fantail is color coded as well.
- 100% Individually Shielded Pairs.
- High Quality XLR connectors at both ends.
- One Year Warranty.

Stage Box with Cable 16 Channel

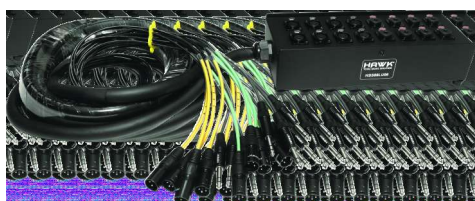

MODEL	SIZE
HSS88LU06	6M

- 8*XLR (female) + 8*1/4" TRS (Female) on the box.
- 8*XLR (Male) + 8*1/4" TRS (Male) on other end.
- Oxygen free copper cable.
- Numbering on cable for easy identification.
- One year warranty.

Stage Box with Cable 8 Channel



MODEL	SIZE
HSS44LU03	3M
HSS44LU05	5M

- 4*XLR (female) + 4*1/4" TRS (Female) on the box.
- 4*XLR (Male) + 4*1/4" TRS (Male) on other end.
- Oxygen free copper cable.
- Numbering on cable for easy identification.
- One year warranty.

Stage Box with Cable 12 Channel



MODEL	SIZE
HSS84LU03	3M
HSS84LU05	5M

- 8*XLR (female) + 4*1/4" TRS (Female) on the box.
- 8*XLR (Male) + 4*1/4" TRS (Male) on other end.
- Numbering on cable for easy identification.
- Oxygen free copper cable.
- One year warranty.



HSX4LU03 4 Channel Short Snake Cable

MODEL	SIZE
HSX4LU03	3M
HSX4LU05	5M

- 3 Meters / 9.84 Foot.
- 4 * XLR Male at one end.
- 4 * XLR Female at other end.
- Oxygen Free Cooper.
- One Year Warranty.
- Ideal for Patch Bays / Multi-Track Recorders / Mixers / Audio Interfaces.



HST4LU03 4 Channel Short Snake Cable

MODEL	SIZE
HST4LU03	3M
HST4LU05	5M

- 3 Meters / 9.84 Foot.
- 4 * TRS Male at one end.
- 4 * TRS Male at other end.
- Oxygen Free Cooper.
- One Year Warranty.
- Ideal for Patch Bays / Multi-Track Recorders / Mixers / Audio Interfaces.



HSX8LU05 8 Channel Short Snake Cable

MODEL	SIZE
HSX8LU03	3M
HSX8LU05	5M

- 5 Meters / 16.40 Foot.
- 8 * XLR Male at one end.
- 8 * XLR Female at other end.
- Oxygen Free Cooper.
- One Year Warranty.
- Ideal for Patch Bays / Multi-Track Recorders / Mixers / Audio Interfaces.

SNAKE CABLE/CABLE ROLL



HXT8LU03
8 CHANNEL SHORT
SNAKE CABLE

- 3 Meters / 9.84 Foot.
- 8 * XLR Male at one end.
- 8 * TRS Male at other end.
- Oxygen Free Cooper.
- One Year Warranty.
- Ideal for Patch Bays / Multi-Track Recorders / Mixers / Audio Interfaces.

4 Channel Multicore Snake Cable



- 4*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC04	100 Mtr.

8 Channel Multicore Snake Cable



- 8*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC08	100 Mtr.

12 Channel Multicore Snake Cable



- 12*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC12	100 Mtr.

16 Channel Multicore Snake Cable



- 16*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC16	33 Mtr.
HMSC16	50 Mtr.
HMSC16	100 Mtr.


20 Channel Multicore Snake Cable



- 20*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC20	33 Mtr.
HMSC20	50 Mtr.
HMSC20	100 Mtr.

24 Channel Multicore Snake Cable



- 24*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC24	33 Mtr.
HMSC24	50 Mtr.
HMSC24	100 Mtr.

32 Channel Multicore Snake Cable



- 32*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC32	33 Mtr.
HMSC32	50 Mtr.
HMSC32	100 Mtr.

40 Channel Multicore Snake Cable



- 40*2*0.14mm2(AWG26).
- High quality oxygen free copper cable.
- One year warranty.

Model No.	Length
HMSC40	33 Mtr.
HMSC40	50 Mtr.
HMSC40	100 Mtr.



HSP210LU100
2*1.0 MM2 (AWG17) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
PLASTIC SPOOL

CABLE ROLL




HSP213LU100
2*1.3 MM2 (AWG16) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
PLASTIC SPOOL



HSP215LU100
2*1.5 MM2 (AWG15) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
PLASTIC SPOOL



HSP220LU100
2*2.0 MM2 (AWG14) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
PLASTIC SPOOL

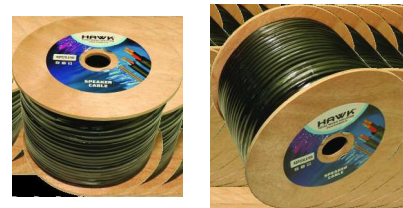

HSP225LU100
2*2.5 MM2 (AWG13) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
WOODEN SPOOL



HSP415LU100
4*1.5 MM2 (AWG15) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
WOODEN SPOOL



HSP425LU100
4*2.5 MM2 (AWG13) /
OFC SPEAKER CABLE /
BLACK COLOR /100 METERS /
WOODEN SPOOL



HGP2075LU100
2*0.75 MM2 (AWG18) /
OFC SPEAKER CABLE
/ GREY /100 METERS /
PLASTIC SPOOL



HGP210LU100
2*1.0 MM2 (AWG17) /
OFC SPEAKER CABLE
/ GREY /100 METERS /
PLASTIC SPOOL



HGP213LU100
2*1.3 MM2 (AWG16) /
OFC SPEAKER CABLE
/ GREY /100 METERS /
PLASTIC SPOOL



HGP215LU100
2*1.5 MM2 (AWG15) /
OFC SPEAKER CABLE
/ GREY /100 METERS /
PLASTIC SPOOL



HGP225LU100
2*2.5 MM2 (AWG13) /
OFC SPEAKER CABLE
/ GREY /100 METERS /
WOODEN SPOOL



HTWP2075 LU100
2*0.75 MM2 (AWG18) /
OFC SPEAKER CABLE /
TWIN CABLE

CABLE ROLL



HTWP210LU100
2*1.0 MM2 (AWG17) /
OFC SPEAKER CABLE /
TWIN CABLE



HTWP213LU100
2*1.3 MM2 (AWG16) /
OFC SPEAKER CABLE /
TWIN CABLE



HTWP215LU100
2*1.5 MM2 (AWG15) /
OFC SPEAKER CABLE /
TWIN CABLE

MICROPHONE CABLE ROLL



HMC012-BK

Microphone Roll Cable 100 Meters

- 24 AWG.
- Oxygen free copper .
- Shield - 64X0.12.
- Inner conductor (20X.12) X2.
- OD 60mm.



HMC012-BL

Microphone Roll Cable 100 Meters

- 24 AWG.
- Oxygen free copper .
- Shield - 64X0.12.
- Inner conductor (20X.12) X2.
- OD 60mm.



HMC012-GR

Microphone Roll Cable 100 Meters

- 24 AWG.
- Oxygen free copper .
- Shield - 64X0.12.
- Inner conductor (20X.12) X2.
- OD 60mm.



HMC012-OR

Microphone Roll Cable 100 Meters

- 24 AWG.
- Oxygen free copper .
- Shield - 64X0.12.
- Inner conductor (20X.12) X2.
- OD 60mm.



HMC012-RD

Microphone Roll Cable 100 Meters

- 24 AWG.
- Oxygen free copper .
- Shield - 64X0.12.
- Inner conductor (20X.12) X2.
- OD 60mm.

CABLE/CONNECTOR



SFFLU00.15

Y CABLE 6.3MM TRS MALE
TO DUAL 6.3MM TRS FEMALE
6 INCH



STXFLU

3.5 MM TRS MALE
TO XLR FEMALE

Model No.	Length
STXFLU 03	3 M
STXFLU 05	5 M



TMRLU03

Y CABLE 3.5MM TRS MALE
TO DUAL RCA MALE



STMLU

3.5MM TRS MALE
TO 3.5MM TRS MALE

Model No.	Length
STMLU 1.5	1.5M
STMLU 03	3 M

CABLE/CONNECTOR



SFPG010
XLR FEMALE TO TS MALE 3M

Model No.	Length
SFPG 010	10 FEET
SFPG 016	16 FEET



TMPLU01.5
Y CABLE 3.5MM TRS MALE TO DUAL TS MALE

Model No.	Length
TMPLU 01.5	1.5 M
TMPLU 03	3 M



TMSLU03
3.5MM TRS MALE TO 6.3MM TRS MALE



SXSG
XLR MALE TO 1/4" TRS MALE

Model No.	Length
SXSG0 05	5 FEET
SXSG0 10	10 FEET
SXSG0 16	16 FEET



SMPG
TS MALE TO TS MALE 16 FEET

Model No.	Length
SMPG 010	10 FEET
SMPG 016	16 FEET



SFSLU03
6.3 MM TRS MALE TO 6.3MM TRS FEMALE 3M




STXM010
3.5MM TRS MALE TO XLR MALE 10 FEET



STXF
3.5MM TRS MALE TO XLR FEMALE

Model No.	Length
STXF 010	10 FEET
STXF 020	20 FEET
STXF 033	33 FEET

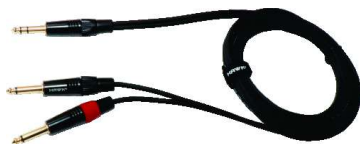

SMPLU03
Y CABLE TRS MALE TO DUAL TS MALE 3M



TMXLU03
Y CABLE 3.5 MM STEREO MALE TO DUAL XLR MALE-3 METER



SMMSG
1/4" TRS MALE TO 1/4" TRS MALE

Model No.	Length
SMMSG 005	05 FEET
SMMSG 010	10 FEET
SMMSG 016	16 FEET



SXFG
XLR Male to XLR Female

Model No.	Length
SXFG 010	10 FEET
SXFG 016	16 FEET
SXFG 033	33 FEET

CABLE/CONNECTOR



TC1

TRRS EXTENSION CABLE 6M/20 FEET




TC3

3.5MM TRS TO TRRS PATCH CABLE 10 CM



TC4

3.5MM TRS FEMALE TO TRRS MALE 10 CM



TC10

3.5MM TRS EXTENSION CABLE



STTF2X006

3.5MM TRS Male to Dual 3.5MM Female 6 Inch



STTM2X006

3.5MM TRS Female to 2X3.5MM male 6 Inch



NMSG010
3M




NXSP010
3M



NXFP010
3M



HSTM-S
TRS MALE SILVER

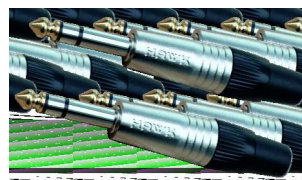

HSTM-SG
TRS MALE SILVER (GOLD TIP)



HTM-S
TS MALE SILVER



HTM-SG
TS MALE SILVER (GOLD TIP)



HXF-S
XLR FEMALE SILVER



HXM-S
XLR MALE SILVER

DB CABLE



HDTM803
DB25 TO XLR FEMALE



HDTF803
DB25 TO XLR MALE



HDTP803
DB25 TO TS MALE

STAGE BOX WITH COMBO JACK



SB804

- 8 XLR female input.
- 4 XLR male output.
- Heavy duty steel.
- Cover included.
- One year warrant



SB1604

- 16 XLR female input.
- 4 XLR male output.
- Heavy duty steel.
- One year warranty.



SB3208

- 32 XLR female input.
- 8 XLR male output.
- Heavy duty steel.
- One year warranty.



SB121N

- 12 XLR female input.
- Heavy duty steel.
- One year warranty.



SB1608

- 16 XLR female input.
- 8 XLR male output.
- Heavy duty steel.
- One year warranty.



SBC81N

- 4 XLR female input.
- 4 XLR combo jack input.
- Heavy duty steel.
- Cover included.
- One year warranty.



SBC804

- 4 XLR female input.
- 4 XLR combo jack input.
- 4 XLR male output.
- Heavy duty steel.
- Cover included.
- One year warranty.



SBC121N

- 8 XLR female input.
- 4 XLR combo jack input.
- Heavy duty steel.
- Cover included.
- One year warranty.



SBC1204

- 8 XLR female input.
- 4 XLR combo jack input.
- 4 XLR male output.
- Heavy duty steel.
- Cover included.
- One year warranty.



SBC1604

- 12 XLR female input.
- 4 XLR combo jack input.
- 4 XLR male output.
- Heavy duty steel.
- Cover included.
- One year warranty.



SBC1608

- 12 XLR female input.
- 4 XLR combo jack input.
- 8 XLR male output.
- Heavy duty steel.
- Cover included.
- One year warranty.



SBC2408

- 16 XLR female input.
- 8 XLR combo jack input.
- 8 XLR male output.
- Heavy duty steel.
- One year warranty.

STAGE BOX WITH COMBO JACK



SB8IN

- 8 XLR female input.
- Heavy duty steel.
- One year warranty.



SB1212

- 12 XLR female input.
- 12 XLR male output.
- Heavy duty steel.
- One year warranty.



SB2408

- 24 XLR female input.
- 8 XLR male output.
- Heavy duty steel.
- One year warranty.

POWER SEQUENCER



PS-8

Single Phase Power Sequencer

- This sequencer is a compact size, powerful intelligent timing device. It combines the function of many conventional products in.
- LCD screen displaying the ID, year, month, day, time and IP address.
- Voltage indicate: input and output voltage indicator
- Current indicate: input and output current indicator
- Power switch: power switch with earth leakage protection.



K108

Intelligent Power Supply Sequencer

- This sequencer is a compact volume, simple operation of 8 intelligent power supply sequencer, with air switch mainly used in a bar or hall performance with high power requirements.
- 8-Channel output, 16A universal socket
- Support channel 1 second interval timing switch control.
- Supports cascading control of 2 devices.
- Support external switching signals to trigger sequencer startup and shutdown.



PS108A

Intelligent Power Supply Sequencer

- This sequencer is a compact size, powerful intelligent timing device. It combines the function of many conventional products in.
- 8-Channel output, 16A universal socket
- Support lock function for panel, which avoids misoperation.
- Supports cascading control of 2 devices.
- Support external switching signals to trigger sequencer startup and shutdown.
- 2" colored LCD screen with Real - time showing of the voltage, date, time and the on/off date of each channel.

ACCESSORIES



HPP05
ISOLATION PAD

- Size: 170x300x40mm (WxDxH).
- Suit for 5" monitor speaker.




HPP08
ISOLATION PAD

- Size: 390x280x40mm (WxDxH).
- Suit for 8" monitor speaker.



SM01
SHOCK MOUNT

- Rugged metal body.
- Die cast steel adaptor with 5/8" thread.
- Fits any large diaphragm condenser microphone with screw system.
- Angle adjustment with lock into place.
- Black Color.

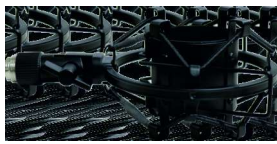

SM02
SHOCK MOUNT

- Fits any large diaphragm condenser Mic 42-48mm in diameter.
- Rugged metal body.
- Die cast steel adaptor with 5/8" thread, 5/8" to 3/8" adapter included.
- Double elastic spring and protective EVA lining inside.
- Angle adjustment with lock into place.
- Black Color.




PS03
POP FILTER

- The gap in between then disperses any remaining air pressure, so by the time it passes the second screen, the blast is easily contained to produce great quality recordings.
- Functions: Banish the dreaded hissing and lisping sounds that come when pronouncing the letter "S" and blocks those ugly "Plosives" that follows "B" and "P".
- Warranty: One year warranty against manufacturing defect.



PS01
POP FILTER

- POP Filter Diameter 6.25".
- Nylon Mesh Diameter 5.90".
- Dual Layer Micro Weave Nylon Mesh.
- Gooseneck Length 14".
- C-Clam Mount.
- Black Color.

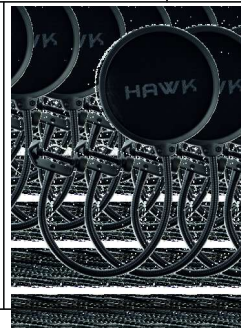

PS02
POP FILTER

- POP Filter Diameter 5.25".
- Nylon Mesh Diameter 4.65".
- Dual Layer Micro Weave Nylon Mesh.
- Gooseneck Length 14".
- C-Clam Mount.
- Black Color.



WS01
WIND SHIELD FOR MICROPHONE



REFLECTION SHIELD PRO

- Polyester fiber.
- Sound absorbing cotton.
- Plastic plate.
- Sanding Linen.
- High - impact ABS plastic/high-density open-cell acoustic foam.
- Size: 450mmx305mmx185mm.



REFLECTION SHIELD

- Professional vocal reflection filter shields the recording microphone from unwanted acoustic artefacts – create cleaner, focused and more intelligible recordings.
- Metal frame and absorbent foam interior.
- Lightweight and portable design.
- Warranty: One year warranty against manufacturing defect.



HA4+
4-Channel Stereo Headphone Amp

- Ultra-compact headphone amplifier system for studio and stage applications.
- Phones level control per channel.
- USB bus powered, can be powered from power bank or any micro USB charger. Not to be charged from laptop or computer.
- One Year warranty against manufacturing defect.



HP01
Monitor Headphone

- Unique design and fashionable appearance
- Durable headband made of high quality engineering
- Small in size, lightweight, comfortable wearing
- Excellent impedance, suitable sensitivity, compatible with various kind of equipment.
- Frequency Response: 15Hz-22kHz
- Max. Power: 400mW

HAWK[®]

TOTAL MUSIC SOLUTION

VIBE MINI 8BT

All-in-One Battery-Powered Portable PA
with Professional-Grade Mixer

MAKE SOME NOISE



2 YEAR MANUFACTURING WARRANTY AND 1 YEAR EXTENDED WARRANTY UPON REGISTRATION.


HAWK[®]

TOTAL MUSIC SOLUTION

PULSE

SERIES
ACTIVE SPEAKERS

FEEL THE BEAT

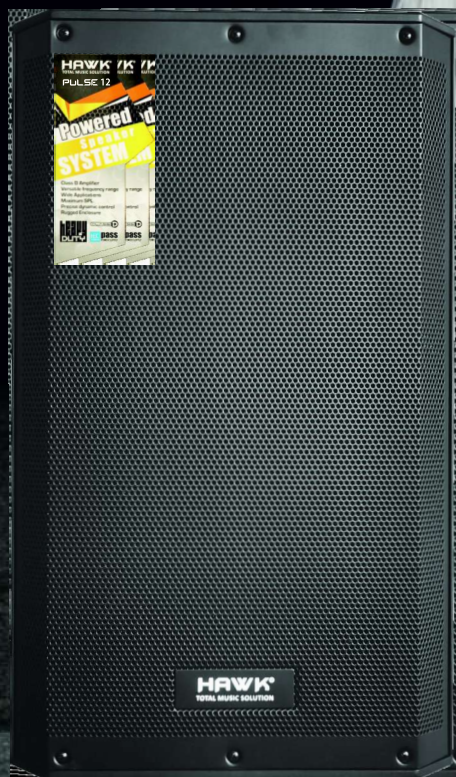

PULSE 12
ACTIVE SPEAKER



PULSE 15
ACTIVE SPEAKER



2 YEAR MANUFACTURING WARRANTY AND 1 YEAR EXTENDED WARRANTY UPON REGISTRATION.

HAWK[®]
TOTAL MUSIC SOLUTION



www.hawkpro.in



support@hawkpro.in



+91- 8130129200